

NEW MODELS RESIDENTIAL BROCHURE

WELL DESIGNED EASY TO CUSTOMIZE QUICK TO INSTALL













Shaker Series


Discover our Shaker series. The **Shaker XL** model is the embodiment of contemporary design. It integrates seamlessly into modern architectures. The **Shaker** model, on the other hand, offers understated elegance with its recessed embossment. Perfect for those looking for a garage door capable of matching a variety of architectural styles, these models combine simplicity and refinement. Whatever your choice, this series will undoubtedly elevate the appeal of your house and keep you aligned with the latest trends.



Standard configurations



Shaker XL



Shaker



Examples









Available colors

Galvanized Steel













Please note that the colors shown in the photo may slightly differ from the actual color of the door.

Dark Oak



Black


Technical information

Panel height	18, 21 and 24 inches (45, 53 and 60 cm)
Panel width	Up to 24 feet (7,32 m)
Door Thickness	1 ¾" (44,45 mm) / RSI 2,81 (R-16)
Windows (21" and 24" panels)	Shaker XL: Std injected frame 40x13 woodgrain panel; Shaker XL: Shaker Custom Urban Extruded Frame
	Shaker: Shaker Custom Urban Extruded Frame
Metal Thickness	26 ga Steel: 0,47 mm (0,0185 in)
Insulation	High-density polyurethane meeting the highest environmental standards.
End Block	Made of 100% recycled materials - A Garex exclusivity.
Coating	Baked Polyester (2 layers)
Texture	Woodgrain




New Hampshire XL

Discover our **New Hampshire XL** model. This model brings an elegant country aesthetic with its 11 distinctive vertical lines. This unique door adds a warm, authentic touch to your home while incorporating contemporary elements that will delight style enthusiasts.



Standard configurations

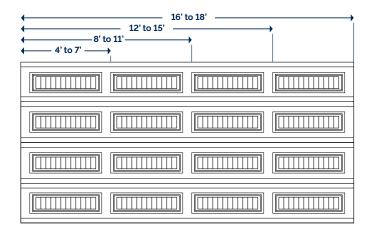



Examples









Available colors

Galvanized Steel












Iron Ore





Black

Please note that the colors shown in the photo may slightly differ from the actual color of the door.



Technical information

Panel height	18, 21 and 24 inches (45, 53 and 60 cm)
Panel width	4 to 24 feet (1,22 m to 7,32 m)
Door Thickness	1 ¾" (44,45 mm) / RSI 2,81 (R-16)
Windows	40x13 Standard injected frame
Metal Thickness	26 ga Steel: 0,47 mm (0,0185 in)
Insulation	High-density polyurethane meeting the highest environmental standards.
End Block	Made of 100% recycled materials - A Garex exclusivity.
Coating	Baked Polyester (2 layers)
Texture	Woodgrain

GLASS SELECTION

















PIN HEAD




SATIN / FROSTED





DARK TINTED





GRAY 6ММ

SUPERGRAY

*(Available in tempered glass only)



MIRROPANE GRAY

WEATHER SEALS

Weather seals are essential to maintain the energy efficiency and durability of your garage door. They prevent air infiltration and preserve heat, thereby reducing energy costs. Protect your space from the elements by choosing suitable weather seals.



OPERATORS

Whether you're looking for a quiet, smartphone-connected garage door opener, one with lighting, or any other features, we have a wide inventory of garage door openers to meet your needs.








ELEVATION TYPES

Whatever the configuration of the space available to install the operating mechanism, we have the right system for your environment. Additional options are also available.











Standard Sloped roof

High lift

Low headroom

Full vertical lift



GARAGE DOOR MANUFACTURER PERFORMANCE MADE SIMPLE

QUEBEC

610, Principale St Val-Alain (QC) GOS 3H0

MONTREAL

10020, Mirabeau St Anjou (QC) H1J 1T6 **NEW-BRUNSWICK**

62, Saint-André Rd Saint-André (NB) E3Y 3S9

P. 1 800 748-3317 F. 1 877 744-3443 info@garex.ca

WWW.GAREX.COM

FOLLOW US!



VISUALIZE YOUR GARAGE DOOR WITH OUR DESIGN CENTER

